


# THE QX SYSTEM GUIDE



*From Foundation,  
to a Flawless Finish*

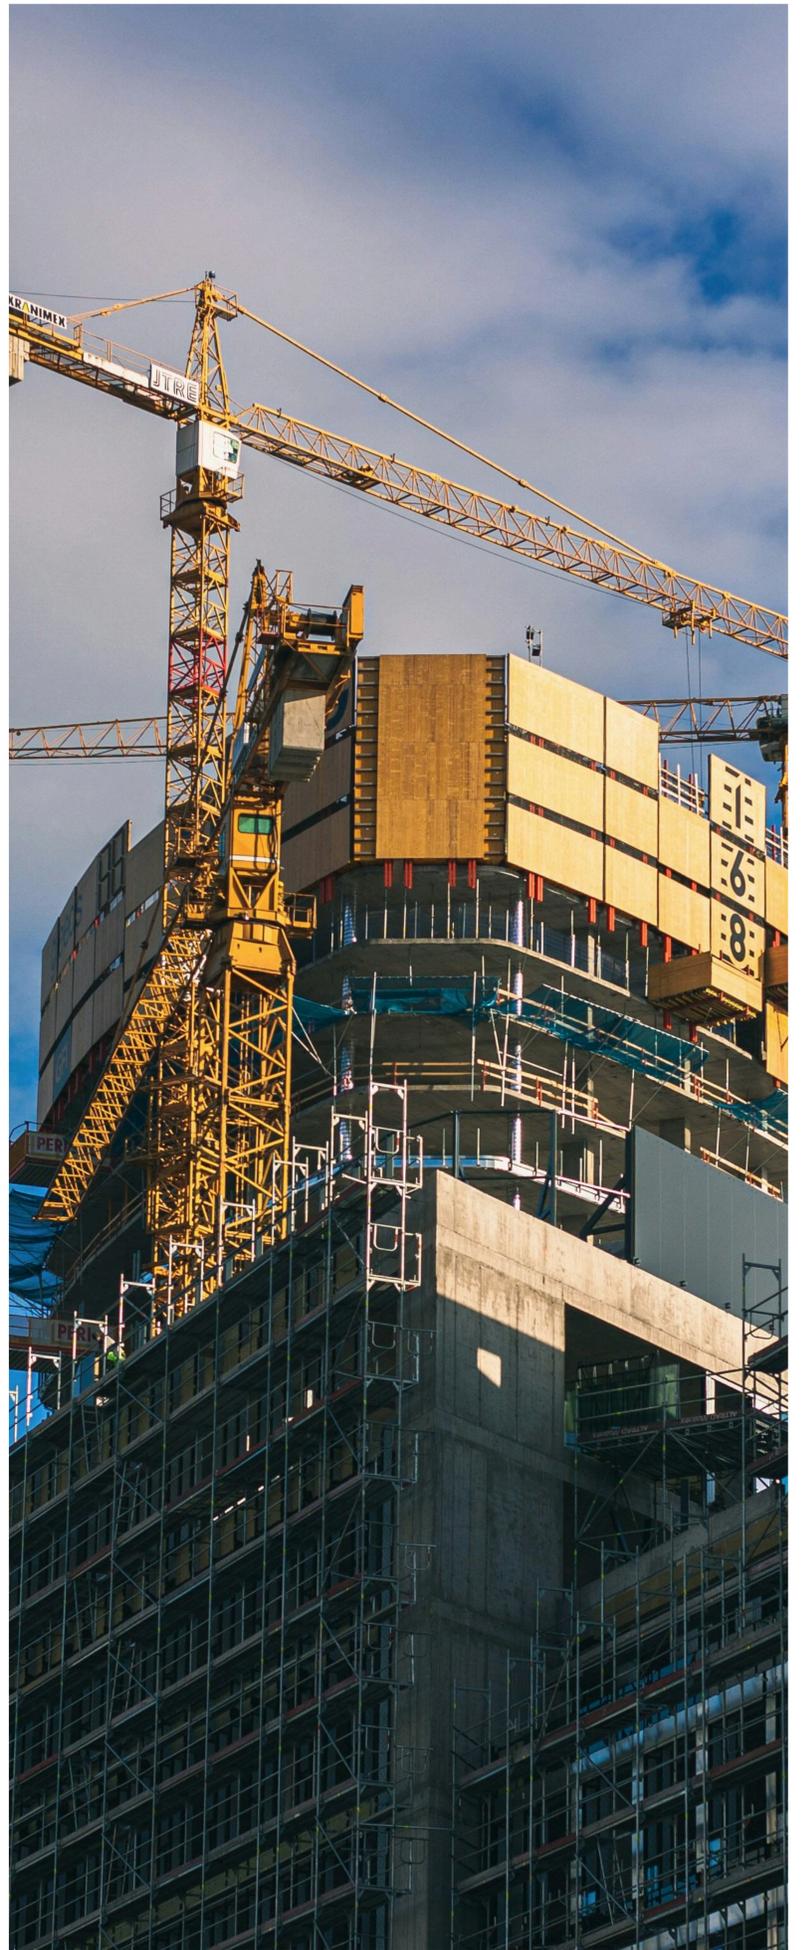

# More Than Products. A Professional System.

On any job site, results are all that matter. The reputation of your business is built on the quality and durability of your work. That's why we created the QX System.

This guide isn't just a catalogue of products; it's a framework for a perfect finish, every time. Each leveller, repair mortar, and adhesive in the QX family is engineered not as a standalone item, but as a component in a fully integrated, high-performance system.

When you choose QX, you're choosing a commitment to three core principles:

## 1. Guaranteed Performance

Our products are formulated and rigorously tested to work together seamlessly. From primer to self-levelling compound, every connection is designed to be failsafe, giving you the confidence to stand behind your work for years to come.

## 2. A Healthier Standard

The future of construction is about building safer, healthier spaces. That's why our entire system is built on a foundation of advanced, ultra-low VOC technology. Better air quality for you, your team, and your clients is a non-negotiable part of our promise.

## 3. Partnership on Site

We see ourselves as your partner, not just your supplier. We provide the straightforward expertise and reliable materials that allow you to work more efficiently, solve problems faster, and deliver the flawless results that grow your reputation.

**Welcome to the QX System.**  
**Your professional standard, from foundation to finish.**

# System Contents

## SECTION 1

### Repair & refine

*Perfection by Hand*

- Q050 Razor Finish Smoothing Compound
- Q060 Rapid Strength repair mortar

## SECTION 2

### Create the Foundation

*The Power of the Pour*

- Foundation Series Chart
- Q350 Self-Levelling Compound
- Q450 Self-Levelling Compound
- Q550 Self-Levelling Compound

## SECTION 3

### Bond & Protect

*The Final, Critical Connections*

- QX XFlow Primer
- QX Vapour Block Moisture Barrier
- QX CoverGrip
- QX FineLine Sealant
- QX UniGrip

# How to Use This Guide

The QX System is designed to provide a solution for every stage of your project. Use this guide to quickly identify the right products for your specific application.

## 1. Identify Your Job Type



### FIXING & PREP

Need to fix holes, cracks, or perfect the surface?


Go to Section 1: Repair & Refine



### LEVELLING

Need to create a flat, smooth, and level foundation?

Go to Section 2: Create the Foundation

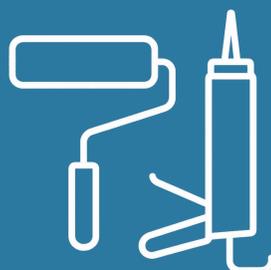

### INSTALLATION

Need to prime, glue, or seal your finished floor?

Go-to Section 3: Bond & Protect

## 2. Find Your Specific Solution

*If your substrate has:*

*Your first step is on page:*

**High Moisture Content**

**23** (QX Vapour Block)

**Deep Holes or Damage**

**7** (Q060 Structural Repair)

**Minor Imperfections**

**5** (Q050 Razor Finish)

**Standard Levelling Needs**

**13** (Q350 High Strength)

**High-Traffic Needs**

**15** (Q450 Pro Flow)

**Timber or Exterior Needs**

**17** (Q550 Extended Fiber)



# Section 1: **Repair & Refine**



## *Perfection by Hand.*

*A flawless floor is only as good as the unseen work that lies beneath. This is where skill, precision, and the right tools come together to build true integrity into the substrate. Whether it's repairing deep structural damage or refining a surface to a glass-like smoothness, this is the critical first stage.*

# Q050 Razor Finish

*The Professional's edge*

## Ultra-Fine Smoothing Compound

When your surface has to be absolutely flawless, QX Razor Finish is the essential tool. This high-polymer, 100% sand-free smoothing compound is engineered to create a glass-smooth, invisible patch over a wide range of substrates. Its rapid cure and ultimate strength make it the only choice for preparing surfaces under delicate, high-value floor coverings where imperfections cannot be tolerated.

Perfection is in the details



### True Feather Edge Finish

**100% sand-free formula** allows you to skim down to a microscopic edge. It creates a perfectly seamless, **ultra-smooth surface with zero telegraphing**



### Cover Ready in 15 Minutes

Dramatically accelerate your prep work. This rapid-set formula allows for the **application of most floor coverings just 15 minutes** after placement, eliminating downtime



### No Primer Required

Engineered for a powerful grip without the extra step. Q050 Razor Finish requires **no priming on most common, well-prepared substrates**

## IDEAL FOR:

- **Creating a glass-smooth surface** over cured levellers.
- **Skim-coating over plywood joints**, seams, and screw heads.
- Filling and **feathering over old, non-water-soluble adhesive** residue.
- **Hiding trowel marks** and minor surface imperfections.



## APPLICATION GUIDE

### 1. MIX:

Blend with water to a smooth, creamy paste (approx. 2 parts powder to 1 part water). You have a 10-15 minute working time.

### 2. APPLY & PRESS:

Using a clean steel trowel, press the compound firmly across the imperfection, ensuring it fills completely.

### 3. FEATHER FINISH:

With the trowel at a low angle, pull the edges out tight to create a seamless, invisible blend with the surrounding surface.

## TECHNICAL DATA

### Features

**Application Depth**

**Ready for Cover**

**Formula**

**VOC Level**

**Pack Size**

### Specification

**Feather Edge to 13mm**

Approx. 15 Minutes

100% Sand-Free, Polymer

**Ultra Low**

5 kg bucket

### PRO-TIP & SYSTEM INTEGRATION:

Use QX Razor Finish for the final surface refinement **after** initial deep repairs with **Q060 Rapid Strength**, and **before** creating the perfect level foundation with the **QX Foundation Series**.

# Q060 Rapid Strength

*Strength in Minutes. Not Hours.*

## Rapid Hardening Repair Mortar

When deep repairs need to be strong, fast, and fail-safe, Q060 is the definitive professional choice. This heavy-duty, low-slump mortar is engineered to fill voids at any depth in a single application, achieving exceptional strength at an incredible speed. Stop waiting for traditional mortars to cure; with QX 060, you can keep your project moving without compromise.

## The Professional's Go-To Mortar



### Unlimited Depth

Fill deep holes, trenches, and voids in one single pour. **No layering is required**, saving you hours of work and ensuring a monolithic, crack-free repair.



### Cover Ready in 1 Hour

Our rapid-set technology means you can install levellers, membranes, or **floor coverings in just 60 minutes** after application, dramatically accelerating your project timeline.



### Industrial-Grade Strength

Cures to an exceptionally hard **35MPa**, making it highly resistant to impact and vibration. The perfect choice for high-traffic commercial environments, workshops, and ramps.

## IDEAL FOR:

- Rapidly filling **deep holes** and recreating level surfaces
- Patching **major cracks and damaged concrete** sections.
- Forming **durable ramps and transitions**.
- Rebuilding and repairing **damaged steps and risers**.
- Repairing **high-impact areas** in workshops and warehouses.
- Grouting **bolt holes** and other **structural voids**.



## APPLICATION GUIDE

### 1. MIX:

Add a 10kg bucket to 2.3 – 2.7L of clean water. Use a drill and paddle mixer and mix to lump-free consistency.

### 2. APPLY & COMPACT:

Using a trowel, press the mortar firmly into the repair area. Ensures full compaction and a tenacious bond to the substrate. Build up the material as needed.

### 3. FINISH:

Trowel the surface to a smooth, flat finish. The repair will be ready for foot traffic in 40–50 minutes.

## TECHNICAL DATA

### Features

**Compression Strength**

**Application Depth**

**Ready for Foot Traffic**

**Ready for Covering**

**VOC Level**

**Pack Size**

### Specification

**35 MPa (after 28 days)**

Unlimited

40–50 Minutes

60 Minutes

**Ultra Low**

10kg bucket

### PRO-TIP & SYSTEM INTEGRATION:

For optimal results on highly absorbent substrates, prime the area first with **QX XFlow Primer**. Once cured, Q060 provides the perfect, solid base for the **QX Foundation Series** of self-levelling compounds.



## Section 2: **Create the Foundation**



## *The Power of the Pour.*

*This is where transformation happens. The QX Foundation Series is a family of high-performance self-levelling compounds engineered to create a perfectly flat, strong, and reliable surface. From here, anything is possible.*



## Stability over Timber Subfloor

### Q550 Extended Fiber

**The Challenge:** Levelling an old, slightly flexible particleboard subfloor in a home renovation prior to installing engineered timber.

**The Solution:** Q550's fiber reinforcement provided the necessary flexural strength and stability, creating a perfect, crack-free base for the new flooring.



## High-Traffic Retail Durability

### Q450 Pro Flow

**The Challenge:** Needed a fast-curing, extremely durable and flat surface to handle rolling loads and heavy foot traffic before installing direct-stick vinyl.

**The Solution:** Q450 provided a 35MPa rock-solid foundation that was ready for covering in 24 hours, meeting the tight construction schedule.



## A Flawless Base for Floating Floors

### Q350 High Strength

**The Challenge:** Correcting an uneven concrete slab in a new build to meet the strict flatness requirements for LVT flooring.

**The Solution:** Q350 delivered a smooth, low-dust, and perfectly level surface, guaranteeing a quick and easy installation for the flooring contractor.

# Choosing Your Foundation The QX Levelling System

Every project demands a perfect foundation, but not every project is the same. The QX Foundation Series offers a dedicated solution for any challenge you face on site. Use this chart to quickly select the ideal high-performance self-levelling compound based on the specific speed, strength, and substrate requirements of your job.



Ultra-Low VOC  
Platform (<0.5 mg/m3)



Features	Low Dust Formula	Pro - Flow	Extended Fiber
<b>Primary Use</b>	All-round performance for residential & light commercial	High-traffic commercial and demanding direct-stick jobs	The ultimate solution for any substrate, including timber & exterior
<b>Compressive Strength</b>	<b>25 MPa</b>	<b>35 MPa</b>	<b>40 MPa</b>
<b>Application Thickness</b>	1 - 30 mm	1 - 30 mm	<b>1.5 - 100 mm</b>
<b>Walkable in (approx.)</b>	3 Hours	3 Hours	<b>2 Hours</b>
<b>Cure Time</b>	Standard Cure Time (approx. 24 hours)	Rapid-Dry Technology (Low moisture in 24h)	Rapid-Dry Technology (Low moisture in 24h)
<b>Special Feature</b>	Low-Dust Formula	Superior Flow & Adhesion	<b>Fiber Reinforcement</b>
<b>IDEAL FOR</b>	<b>Floating Floors &amp; Tile</b> (LVT, SPC, Laminate, Carpet, Tiling)	<b>Direct-Stick Flooring</b> (Vinyl Sheet, Glued LVT, Parquetry Flooring) & High-Traffic Areas	<b>Timber Substrates</b> , Exterior Use, Underfloor Heating & The Toughest Jobs

For complete specifications and application details for each product, please see the following pages.

# Q350 High Strength

*The Foundation for Modern Flooring.*

## QX Series Self-levelling compound

The trusted foundation for modern flooring. QX 350 is a high-performance, self-levelling compound specifically engineered to provide a flawless and exceptionally stable base for most residential and commercial projects. It's the all-rounder in the QX Foundation Series, designed to deliver guaranteed results you can stand on. Its smooth-flowing properties and exceptional strength make it the premier choice for creating the perfect surface under floating floor systems.

### Premier choice for modern home



#### Guaranteed Stability


Our advanced formula is **guaranteed not to crack or shrink during curing.**

When paired with QX Primers, it forms a permanent, monolithic bond to the substrate, eliminating call-backs.



#### A Healthier Standard

Certified with an **ultra-low VOC and a low-dust technology**, Q350 contributes to safer indoor air quality during and after installation, making it the responsible choice for any interior space.



#### Perfect for Floating Floors

Engineered to deliver the **superior flatness and compressive strength** needed to fully support floating floor systems like LVT, SPC, Laminate, and Carpet, ensuring their long-term performance.

## IDEAL FOR:

- Creating a flawless base for **Luxury Vinyl Plank (LVP), SPC/WPC and laminate floors**.
- **Levelling concrete subfloors** in residential homes, apartments, and offices.
- Preparing surfaces for **carpet and carpet tile** installation.
- Encapsulating **underfloor heating systems**.



## APPLICATION GUIDE

### 1. PREPARE & PRIME

Ensure the substrate is clean, sound, and free from contaminants. Prime the surface with **QX XFlow Primer** and allow it to become tacky or **QX Vapour Block** for high-moisture concrete.

### 2. MIX

Add a 20kg bag to 4.6 – 4.8L of clean water. Using a paddle mixer, blend for 2–3 minutes until a smooth, lump-free liquid is achieved.

### 3. POUR & FINISH

Pour the mixture onto the primed floor. Spread to the desired thickness and immediately use a spiked roller to release any entrapped air for a perfect finish.

## TECHNICAL DATA

### Features

**Compression Strength**

**Application Depth**

**Working Time**

**Walkable In**

**Ready for Covering**

**VOC Level**

**Pack Size**

### Specification

**25 MPa (after 28 days)**

**1 – 30 mm**

**20 – 30 Minutes**

**Approx. 3 Hours**

**Approx. 24 Hours**

**Ultra Low (<0.5 mg/m<sup>3</sup>)**

**20kg bag**

### PRO-TIP & SYSTEM INTEGRATION:

For a guaranteed, moisture-protected system, prime with **QX Vapour Block** before applying Q350

# Q450 Pro-Flow

*The Ultimate Base for Direct-Stick Flooring.*

## QX Series Superior Self-levelling compound

When speed is critical and adhesion is non-negotiable, **Q450** Pro-Flow is the high-performance levelling compound for professionals. Engineered with advanced flow technology and superior cohesive strength, it creates an exceptionally smooth and dense surface, essential for a tenacious bond with direct-stick adhesives. Its revolutionary rapid-dry chemistry dramatically accelerates project timelines, solving common moisture-related delays.

## Fast Reaction, Consistent Results



### Rapid-Dry Technology

Engineered to reach a **floor-covering-ready state (approx. 3% MC) within 24 hours**. This unique feature allows for the direct application of moisture membranes without a separate moisture barrier, saving a full day on site.



### Adhesion Guaranteed

Its **superior flow** creates an **ultra-smooth, non-porous surface** that prevents adhesives from drying out too quickly. This guarantees a stronger, more reliable bond for demanding applications like vinyl sheet and glued-down LVT.



### Commercial Grade Strength

With a higher **35MPa compressive strength** and a **3 hour walk-on time**, Q450 is built to withstand the heavy loads and rolling traffic of high-traffic commercial environments, all while keeping your project moving forward.

## IDEAL FOR:

- Creating a **flawless, dense base for direct-stick** sheet vinyl, LVT, and rubber flooring.
- **High-traffic commercial applications** in retail, healthcare, and education settings.
- Projects on a **tight schedule requiring next-day application** of coatings or flooring.
- **Levelling large areas quickly** due to its superior flow characteristics.



## APPLICATION GUIDE

### 1. PREPARE & PRIME

Ensure the substrate is clean, sound, and free from contaminants. Prime the surface with **QX XFlow Primer** and allow it to become tacky.

### 2. MIX

Add a 20kg bag to 4.8 – 5.0L of clean water. Using a paddle mixer, blend for 2–3 minutes until a smooth, homogenous liquid is achieved.

### 3. POUR & FINISH

Pour the mixture onto the primed floor. The Pro-Flow technology will do most of the work. Use a smoother and spiked roller to spread and release entrapped air for a perfect finish.

## TECHNICAL DATA

### Features

**Compression Strength**

**Application Depth**

**Working Time**

**Walkable In**

**Ready for Covering**

**VOC Level**

**Pack Size**

### Specification

**35 MPa (after 28 days)**

**1 – 30 mm**

**20 – 30 Minutes**

**Approx. 3 Hours**

**Approx. 12–24 Hours**

**(Moisture Dependant)**

**Ultra Low (<0.5 mg/m<sup>3</sup>)**

**20kg bag**

### PRO-TIP & SYSTEM INTEGRATION:

The rapid-dry nature of **Q450** makes it the perfect foundation when a complete system build-up is required quickly. For a guaranteed, trouble-free installation, pair it with **QX CoverGrip Adhesive** for all direct-stick applications.

# Q550 Extended Fiber

*Any Substrate. Any Challenge. No Compromise.*

## QX Series Ultimate Self-levelling compound

The pinnacle of the QX Foundation Series. **Q550** is an elite, polymer-modified, and fiber-reinforced compound engineered for the most demanding projects. Its interlocking fiber technology provides superior flexural strength, making it the only choice for confidently overlaying challenging substrates like timber. With ultimate strength, unmatched versatility for interior and exterior use, and our fastest curing time, **Q550** is the uncompromising solution for professionals who require absolute performance.

## The Ultimate Leveller

- Unbeatable Versatility

Engineered with advanced polymers for **superior weather resistance**, making it the single solution for both **interior and exterior applications**.

- Goes Where Others Can't


The **fiber-reinforced formula** provides the flexibility and crack resistance required to successfully **level timber, plywood, and particleboard** substrates.

- Fastest & Strongest

Achieves an industrial-grade **40MPa strength** and is **walkable in just 2 hours**, dramatically accelerating your most complex, high-stakes projects and maximizing site efficiency.

- Unmatched Application Depth

A revolutionary formula that can be applied from a 1.5mm feather edge up to a massive **100mm in a single, stable pour**, solving the most severe levelling challenges with ease.

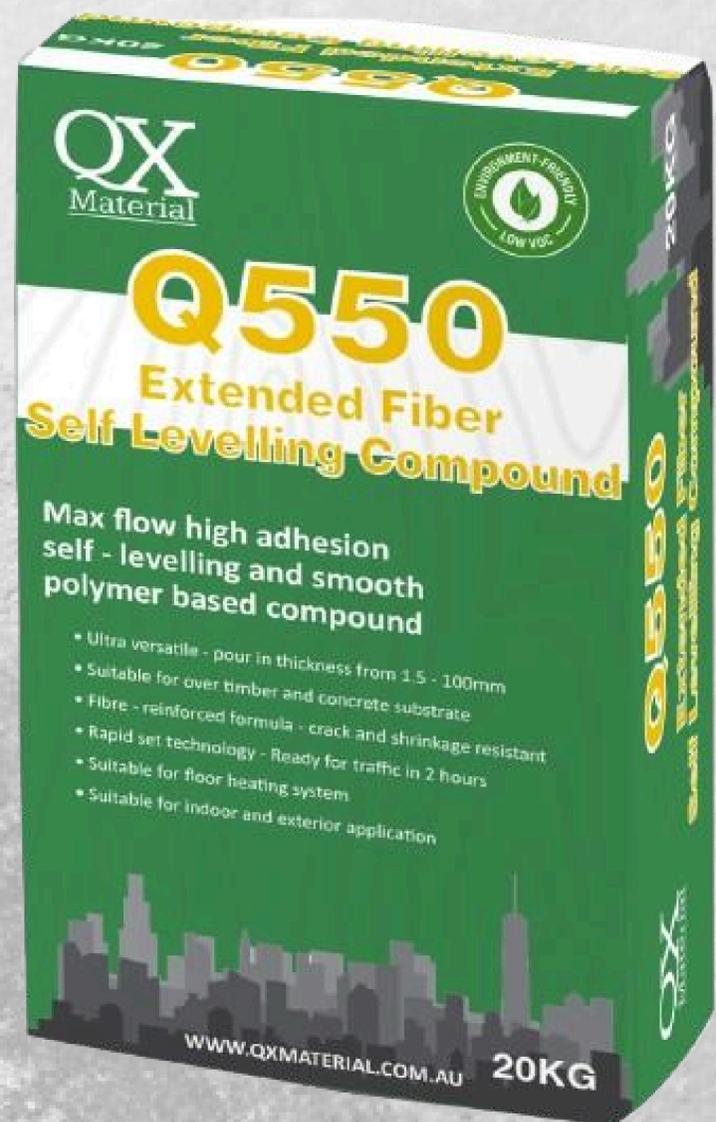

## IDEAL FOR:

- **Overlaying timber**, plywood, and particleboard subfloors without failure.
- **Exterior applications** on balconies, patios, and walkways.
- **Critical fast-track projects** requiring the absolute fastest turnaround.
- **Deep-fill applications** up to 100mm to correct major level discrepancies.
- Creating a super-strong base for **heavy commercial traffic** or large format tiles.



## APPLICATION GUIDE

### 1. PREPARE & PRIME

Ensure the substrate is clean, sound, and free from contaminants. Prime the surface with **QX XFlow**

**Primer** and allow it to become tacky or **QX Vapour**

**Block** for high-moisture concrete.

### 2. MIX

Add a 20kg bag to 4.4 – 4.6L of clean water. Using a paddle mixer, blend for 2–3 minutes until a smooth, homogenous liquid is achieved.

### 3. POUR & FINISH

Pour the mixture onto the primed floor. Use a smoother and spiked roller to spread and release entrapped air for a perfect finish.

## TECHNICAL DATA

### Features

**Compression Strength**

**Application Depth**

**Working Time**

**Walkable In**

**Ready for Covering**

**VOC Level**

**Pack Size**

### Specification

**40 MPa (after 28 days)**

**1.5 – 100 mm**

**20 – 30 Minutes**

**Approx. 2 Hours**

**Approx. 12–24 Hours**

**(Moisture Dependant)**

**Ultra Low (<0.5 mg/m<sup>3</sup>)**

**20kg bag**

### EXPERT SPECIFICATION & SYSTEM USE:

For the most demanding jobs, such as exterior or wet areas, combine it with **QX Vapour Block** for ultimate moisture protection, and **QX CoverGrip** for a tenacious final bond. This creates a fully warranted, worry-free system from substrate to surface.



# Section 3: **Bond & Protect**



## *The Final, Critical Connections.*

*A perfect foundation is only half the job. This is where system integrity is guaranteed. The Bond & Protect family features the essential primers, adhesives, and sealants engineered to create a permanent connection between the substrate, the foundation, and the final floor covering. These are the critical links that ensure a flawless finish and long-term protection.*

# XFLOW Primer

## QX Series Universal Primer

*The Tenacious Grip for a Perfect Bond.*

QX XFlow is a high-performance, universal acrylic primer that forms the critical link between your substrate and the QX levelling system. Its advanced, high-penetration formula is engineered to bond to a wide variety of surfaces, neutralizing porosity and creating a tenacious grip. With its fast-drying technology and clear visual control, XFlow is the essential first step to guarantee a flawless, permanent bond.



## Sealing Porous Surfaces

Penetrates and seals absorbent concrete and screeds, preventing water from being sucked out of the levelling compound too quickly.

## Maximising Adhesion

Creates a powerful, high-tack surface that forms a tenacious bond with any QX underlayment..

## Enhanced Flow

Promotes a smooth, even flow and extended working time for all QX self-levelling compounds.

## Binding Residual Dust

Locks down fine dust particles left after cleaning, ensuring a completely sound and uncontaminated bond.

## The XFlow Advantage:

- **One Primer for Multiple Substrates:** Designed as the go-to solution for busy professionals. QX XFlow is expertly formulated for use on **concrete, cement screeds, wood, plasterboard**, and even over **non-porous surfaces like existing ceramic tiles**.
- **Coloured for Visual Control:** Our signature blue tint provides clear visual confirmation of coverage. It eliminates guesswork, prevents missed spots, and guarantees a uniformly primed surface every time.
- **A Healthier, Safer Formula:** Consistent with the QX standard, XFlow is an ultra-low VOC, solvent-free primer, ensuring a safer work environment and better indoor air quality.
- **Creates an Impenetrable Bond:** Unlike basic primers, XFlow doesn't just sit on the surface. It penetrates the substrate to reduce air bubbles and water suction from levelling compounds, preventing rapid drying and ensuring a stronger, crack-free finish.

## APPLICATION GUIDE

### 1. PREPARE

Ensure the substrate is clean, sound, and free from contaminants.

### 2. APPLY

Use undiluted on ceramic, stone, wood, or water-resistant adhesive residues. Dilute 1:1–1:2 with water for cementitious/anhydrite surfaces.

### 3. DRY

Allow drying (2–5 hours, varies with conditions).

## TECHNICAL DATA

### Features

**Formula**

**Colour**

**Coverage**

**Dry Time**

**VOC Level**

**Pack Size**

### Specification

**Concentrated Acrylic**

Blue (Dries Clear)

0.10–0.20 kg/m<sup>2</sup>

**2–5 Hours**

**Ultra Low (<0.5 mg/m<sup>3</sup>)**

5 / 20kg Jerry can

### Substrate Check:

For standard absorbent substrates, **QX XFlow** is your solution. If you detect high moisture content, see **QX Vapour Block** for ultimate protection. →

# Vapour Block Epoxy DPM

## QX Series Epoxy Moisture Barrier

*Total Moisture Protection & Substrate Repair.*

When a substrate is too problematic for a standard primer, QX Vapour Block is the ultimate solution. This two-component, solvent-free epoxy system functions as both a powerful penetrating primer and a complete moisture vapour barrier (DPM). It's engineered to cure and form an impenetrable seal on even the most challenging surfaces, consolidating weak substrates and permanently locking out dampness to prevent catastrophic flooring failure.



## Blocking Extreme Moisture

Effectively suppresses moisture vapour emissions in concrete slabs, allowing for fast-track flooring installation without the long wait.

## Deep Penetrating Bond

Tenaciously bonds to the concrete matrix, becoming an integral part of the substrate rather than just a surface coating.

## Simple 1:1 Mix Ratio

A user-friendly, two-part system that ensures a reliable and consistent mix every time.

## Creating a Total System Warranty

Using QX Vapour Block is the critical first step in qualifying for a full system warranty on high-risk or commercial projects.

## The VapourBlock Advantage:

- **Dual-Function Power:** A true two-in-one system. It primes the surface for ultimate adhesion AND acts as a **complete moisture barrier**, protecting the entire flooring system from high moisture levels.
- **Problematic Substrates Solver:** Designed to **penetrate and strengthen weak, dusty, or powdery screeds**. It creates a solid surface ready for levelling where other primers would fail.
- **A Healthier, Safer Formula:** Consistent with the QX standard, Vapour Block is **ultra-low VOC**, ensuring a safer work environment and better indoor air quality.
- **Handles Extreme Moisture:** Capable of **suppressing residual moisture** in concrete slabs with up to 100% Relative Humidity, making it essential for damp ground-floor applications.
- **Repairs & Seals Cracks:** Can be mixed with fine sand to create a high-strength epoxy repair mortar, perfect for permanently sealing non-structural cracks and joints before levelling

## APPLICATION GUIDE

### 1. PREPARE & MIX

Ensure the substrate is clean, sound, and free from contaminants. Mix A and B components stir the materials fully.

### 2. APPLY

Apply the primer evenly to fully cover the surface using a fine-pored foam roller cross-stroke. At the same time throwing the quartz sand on applied primer surface..

### 3. DRY

Allow drying (24 - 36hours, varies with conditions). Apply the second coat as soon as the first will accept foot traffic.

*When used as a moisture barrier, a minimum of two coats is required.*

## TECHNICAL DATA

### Features

**Formula**

**Colour**

**Coverage**

**Dry Time**

**VOC Level**

**Pack Size**

### Specification

**Epoxy Resin**

Light Yellow

Up to 0.7 m<sup>2</sup>/Litre

**12-24 Hours**

**Ultra Low (<0.5 mg/m<sup>3</sup>)**

2 L Buckets

### Protect Your Reputation.

Don't risk a costly callback. For all high-moisture or mission-critical applications, **QX Vapour Block** provides absolute peace of mind and is the foundation of a guaranteed QX flooring system.

# CoverGrip Flooring adhesive

## QX Series Universal Flooring Adhesive

*The Bond You Can Stand On.*

QX Cover Grip is an advanced, professional-grade adhesive engineered to provide a powerful and permanent bond for the widest range of floor coverings. Its installer-friendly properties, including a strong initial grab and a long working time, give you the control needed for a precise installation. QX Cover Grip cures to form a tough, permanently resilient bond, ensuring your floor performs flawlessly under the stresses of daily life in both commercial and residential spaces.



## Aggressive Initial Tack

Securely grips flooring on contact to prevent movement during installation.

## Long Working Time

A generous 1-2 hour working time for stress-free positioning on large or complex jobs.

## Easy, Creamy Trowelling

A smooth consistency makes for fast application and excellent coverage rates.

## Low VOC formula

Water-based formula ensures a healthier installation for both installers and end-users.

## The CoverGrip Advantage:

- **One Adhesive for Multiple Covering:** Designed as the go-to solution for busy professionals. QX CoverGrip is expertly formulated for **PVC, Vinyl, Linoleum & Rubber Floor Covering, Textile Floor Covering**, and even **Light needle Punch or Woven Carpet**.
- **Generous Working Time:** Our **working time of 1 – 2 hours** for stress-free positioning and adjustments, giving you full control even on large, complex jobs.
- **A Healthier, Safer Formula:** Consistent with the QX standard, Cover Grip is ultra-low VOC, solvent-free primer, ensuring a safer work environment and better indoor air quality.
- **Effortless Trowelling:** Our signature smooth, creamy consistency provides superior coverage and reduces installer fatigue when working on the most complex of jobs.

## APPLICATION GUIDE

### 1. PREPARE

Ensure the substrate is clean, sound, and free from contaminants.

### 2. APPLY

Stir thoroughly the product before use, Apply it evenly on the surface of substrate by using toothed trowel. Substrates ready to accept flooring material after 5–30 minutes of opening.

### 3. ROLL & DRY

Roll the surface by roller to remove entranced air under the flooring material after the flooring material is applied. Allow Drying (24 hours approximately ).

## TECHNICAL DATA

### Features

**Formula**

**Colour**

**Coverage**

**Working Time**

**VOC Level**

**Pack Size**

### Specification

**Polymer with Resin**

Cream White

Up to 3.75m<sup>2</sup>/Litre

**1 – 2 Hours**

**Ultra Low (<0.5 mg/m<sup>3</sup>)**

5 / 15kg Bucket

### The System Guarantee.

QX CoverGrip is specifically formulated for optimal performance on surfaces prepared with the **QX Foundation Series** levellers and **QX Primers**. Use them together for a flawless result you can stand behind.

# FineLine Sealant

*A Perfect Line. Every Time*

## The Go-To Sealant For:

- Skirting Boards & Baseboards
- Window & Door Frames
- Internal Corners & Cornices
- Sealing Gaps in Panelling & Trim

The final detail defines the job. QX FineLine is an advanced, ultra-flexible acrylic sealant engineered for professionals who demand sharp, clean lines and a finish that lasts. It provides a permanently flexible, crack-proof seal that creates the perfect base for painting.

# UNIGRIP Adhesive

*The Only Grip You Need.*

## The Go-To Solution For:

- [✓] Wall Panels & Sheeting
- [✓] Timber & Mouldings
- [✓] Interior & Exterior Repair
- [✓] Stair Tread Bonding

For jobs that demand immediate strength and a permanent, heavy-duty bond. QX UniGrip is a professional-grade construction adhesive engineered to replace mechanical fasteners in a huge range of applications. Its advanced formula provides exceptional instant grab and a powerful final cure that bonds to nearly any common construction material.



## Your Success is Our Benchmark.

At QX Material, we understand that our success is measured by yours. A perfect product is only half the solution; having the right support when you need it is what makes a real difference on site.

Our commitment to you goes beyond the bag and the bucket. When you choose the QX System, you gain a dedicated partner committed to ensuring your project runs smoothly from foundation to finish.

## The QX Professional Partnership Program

### **Project Specification & Support**

Planning a complex or high-stakes project? Our technical team is available to assist with writing specifications, recommending the ideal system build-up, and ensuring you have the right products for your substrate's unique challenges. We help you get it right from day one.

### **On-Site & Technical Advice**

Encounter a question on site? Need guidance on a tricky application? Our experienced representatives are just a phone call away. We provide practical, real-world advice to help you troubleshoot issues and keep your project moving forward without costly delays.

### **Guaranteed System Integrity**

By using QX products together as a complete, specified system—from moisture barrier to sealant—you are covered by our commitment to quality. We stand behind our integrated solutions, giving you and your client ultimate peace of mind.

## Let's Build Together.

Turn the page for all the ways to get in touch with our team.



***Your Foundation  
for a Perfect Finish.***

---



**View Full Technical Data & SDS**

For detailed product specifications, application guides, and safety information, visit our website.

**[www.QXMaterial.com.au](http://www.QXMaterial.com.au)**



**Project & Technical Support**

Have a question about a specific application or need on-site advice?

Our team is ready to help.

**General Enquiries**

**[Info@QXMaterial.com.au](mailto:Info@QXMaterial.com.au)**